



Reinforced fiberglass enclosures

RizurBox-C

Intended use and application area

RizurBox-C reinforced fiberglass enclosures (thermoboxes) are manufactured according to Technical regulations TU-3442-001-12189681-2014 and are designed for the placement of control and measuring equipment, as well as telecommunication equipment (pressure sensors, flow meters, water gauges, network devices, check valves, etc.) both in outdoor and indoor facilities. RizurBox-C are weather-resistant enclosures designed to protect equipment against low temperatures, condensation, precipitation, dust, chemicals, physical damage, unauthorized access, theft, etc.

RizurBox-C reinforced fiberglass enclosures are designed to be used in indoor and outdoor areas exposed to explosion hazards in accordance with specified requirements, relevant industrial safety guidelines, and the manufacturer's recommendations.

All enclosures are made from inflammable materials and have all the necessary certification.



■ We can manufacture enclosures of any size and design upon the customer's request.

Design description

RIZURBOX-C fiberglass enclosures have a multilayer structure of the body made from inflammable unsaturated polyester resin and glass-reinforced materials. The housing is antistatic.

The outer and inner covers of enclosures are separated by a heat-insulation layer made of polyurethane foam. The K FLEX ALU additional heat-insulation layer can be applied on request.

There are several types of enclosures:

- diagonally opening enclosures
- classical enclosures with one-door opening
- classical enclosures with two-sided opening
- horizontally/vertically-split enclosures
- modular enclosures

Thanks to our production facilities, we're able to manufacture enclosures of any type and size.

Technical specifications

Installation area	General industrial areas Areas exposed to explosion hazards V-1a and V-1d, acc. to Electrical installation code (PUE), Ch. 7.3
Ingress protection	IP54 acc.to GOST 14254-96 IP65 acc.to GOST 14254-96 (on request) IP66 acc.to GOST 14254-96 (on request)
Ambient temperature	-60 ... +70 °C -70 ... +70 °C (with K FLEX ALU additional heat-insulation layer)
Resistivity	To oil products To chemical environments To ultraviolet radiation
Wall thickness	20-40 mm (depending on the design variant)
Fiberglass thickness	2-4 mm (depending on the design variant)
Thermal conductivity	0,03 W/m·K
Fitting materials (locks, hinges)	Stainless steel
Surface resistance (antistatic)	Under 10 ⁹ Ohm

Explosion-proof marking	
• with electrical heating (explosion-proof heater, heating section)	II Gb II C T6...T3 Gb X 1Ex e mb IIC T6...T3 Gb X 1Ex e d IIC T6...T3 Gb X 1Ex e d mb IIC T6...T3 Gb X 1Ex e IIC T6...T3 Gb X (depending on the design variant of the heater and thermoregulator used)
• water/steam heating is under 195 °C	II Gb IIC T3 X or II Gb IIB T3 X
• water/steam heating is under 130 °C	II Gb IIC T4 X or II Gb IIB T4 X
• water/steam heating is under 95 °C	II Gb IIC T5 X or II Gb IIB T5 X
• water/steam heating is under 80 °C	II Gb IIC T6 X or II Gb IIB T6 X
• without heating	II Gb IIC or II Gb IIB
Colour	RAL 7035, light grey any color (on request)
Warranty period	12 months 24/36 months (on request)
Average operation time	Over 15 years

Enclosure delivery options

Basic set

The Basic set includes an enclosure and all separately supplied components: mounting elements for equipment installation, mounting elements for enclosure installation, tube heat exchanger (water/steam), electric heater/heating section, temperature control device, signaling system, lamp, junction box, cable and tube glands, blind flanges, junctions, bolts, washers, nuts, etc.

The Basic set includes everything needed for the installation which is performed by the customer or an installation crew.



Standard set

The Standard set is identical to the Basic set. However, the heaters and the inside fastening elements are installed in accordance with the Customer's technical drawings.

The installation of the enclosure as well as the monitoring and measuring equipment, is performed by the Customer or by an installation crew.



System Set

The System set is almost identical to the Standard set. However, it also includes connecting, shut-off and control equipment (fittings, valves, impulse tubes, pre-insulated tube bundles RizurPak, valve device assemblies, etc.).

The System set includes several types of equipment (enclosures, soft enclosures, insulated impulse tubes, and equipment from third parties).


Installation of the enclosure as well as monitoring and measuring equipment is performed by the Customer or by an installation crew.



Complete set


The Complete set is a fully assembled and ready-for-connection unit with installed monitoring and measuring equipment. The monitoring and measuring equipment is chosen by the Customer:

- the equipment can be preselected by our engineers in accordance with the customer's requirements
- the equipment can be specified by the Customer
- the equipment can be selected and supplied by the Customer.

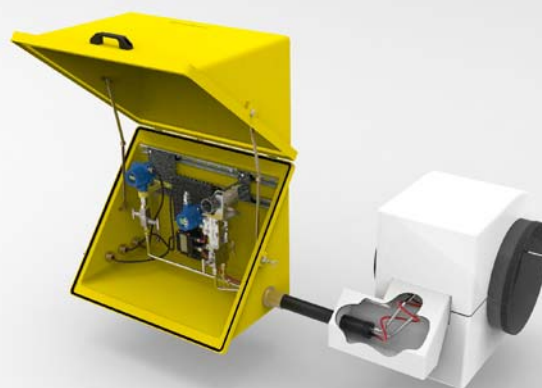

Standard variants of RizurBox-C enclosures

Diagonally opening enclosures

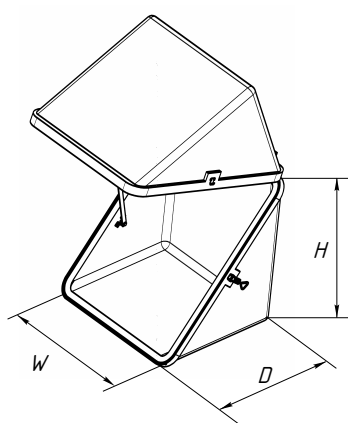

Design variant	Dimensions for reference HxWxD*, mm
RizurBox-C-2	365x360x385
RizurBox-C-4	490x460x390
RizurBox-C-5	490x585x390
RizurBox-C-6	510x470x420
RizurBox-C-7	610x470x470
RizurBox-C-7,5	650x700x550
RizurBox-C-8	610x840x470
RizurBox-C-9	660x1010x470
RizurBox-C-10	680x680x680
RizurBox-C-11	750x595x680
RizurBox-C-12	650x970x560
RizurBox-C-13	570x750x600
RizurBox-C-16	760x860x760

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7 (4912) 20-20-80, marketing@rizur.ru




Reinforced fiberglass enclosure
RizurBox-C-9 with floor-stands



Reinforced fiberglass enclosure
RizurBox-C-7 with mounting clips

Diagonally opening enclosures with a tray




Design variant

RizurBox-C-T7
RizurBox-C-T8
RizurBox-C-T12
RizurBox-C-T13
RizurBox-C-T14
RizurBox-C-T15
RizurBox-C-T16

Dimensions for reference HxWxD*, mm

820x470x470
820x840x470
800x970x640
940x540x540
850x390x380
1090x390x390
900x820x440

The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7 (4912) 20-20-80, marketing@rizur.ru

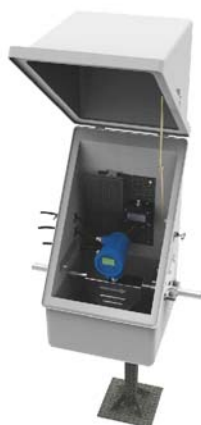


Reinforced fiberglass enclosure
RizurBox-C-T7 with on-pipe fastening



Reinforced fiberglass enclosure
RizurBox-C-T8 with on-pipe fastening

Enclosures with classical opening




Design variant

RizurBox-C-W1
RizurBox-C-W2
RizurBox-C-W3
RizurBox-C-W4
RizurBox-C-W5
RizurBox-C-W6
RizurBox-C-W7
RizurBox-C-W8
RizurBox-C-W9

Dimensions for reference HxWxD*, mm

600x400x350
1000x600x500
1000x600x350
1000x1000x400
500x470x300
850x530x350
400x400x250
1090x890x480
1000x800x500

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7 (4912) 20-20-80, marketing@rizur.ru

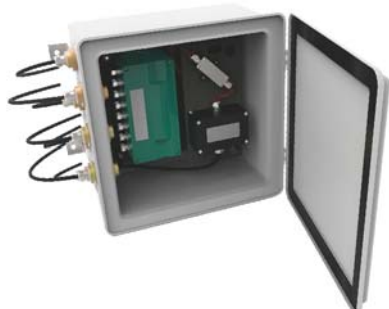


Reinforced fiberglass enclosure
with classical opening RizurBox-C-W7



Reinforced fiberglass enclosure
with classical opening RizurBox-C-W2

Enclosures of CASE type

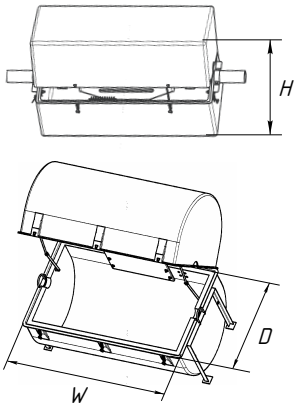	Design variant**	Dimensions for reference HxWxD*, mm
	RizurBox-C-B-M	780x1300x510
	RizurBox-C-B2-M	750x1210x760
	RizurBox-C-B2-B	900x1210x760
	RizurBox-C-B2-H	900x1210x760
	RizurBox-C-B2-L	1100x1210x760
	RizurBox-C-B2-Lm	1080x1290x780
	RizurBox-C-B3-M	750x920x760
	RizurBox-C-B3-B	900x920x760
	RizurBox-C-B3-H	900x920x760
	RizurBox-C-B3-L	1100x920x760
	RizurBox-C-B4-B	900x1520x760
	RizurBox-C-B4-L	1100x1520x760
	RizurBox-C-B4-M	750x1520x760
	RizurBox-C-B5-B	640x890x490

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7 (4912) 20-20-80, marketing@rizur.ru

** The letters L and M in the names of various models of enclosures signify that the upper part is equal to the lower part.

The letter B is used if the upper part of the enclosure is larger than the lower one. The letter H shows that the lower part of the enclosure is larger than the upper one.




Reinforced fiberglass enclosure
RizurBox-C-B3 with on-pipe
fastening



Reinforced fiberglass enclosure
RizurBox-C-B4 with floor-stands

Enclosures of MULTI type

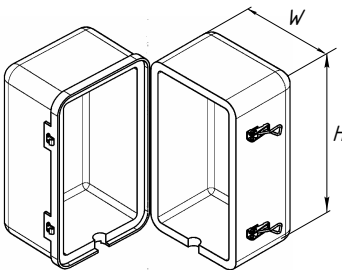	Design variant	Dimensions for reference HxWxD*, mm
	RizurBox-C-M1	420x250x350
	RizurBox-C-M2	680x480x350
	RizurBox-C-M3	760x560x560
	RizurBox-C-M4	500x500x500
	RizurBox-C-M5	610x450x400
	RizurBox-C-M6	680x480x450
	RizurBox-C-M7	350x440x420
	RizurBox-C-M9	385x265x200
	RizurBox-C-M10	380x430x430

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7 (4912) 20-20-80, marketing@rizur.ru




Reinforced fiberglass enclosure
RizurBox-C-M6



Reinforced fiberglass enclosure
RizurBox-C-M2

Horizontally/vertically-split enclosures



Design variant

RizurBox-C-WD1
RizurBox-C-WD2
RizurBox-C-WD3
RizurBox-C-WD4
RizurBox-C-WD5
RizurBox-C-WD6

Dimensions for reference HxWxD*, mm

1140x720x820
1250x700x500
600x770x600
660x770x610
720x820x610
670x980x500

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7 (4912) 20-20-80, marketing@rizur.ru




**Reinforced fiberglass enclosure
RizurBox-C-WD1**



**Reinforced fiberglass enclosure
RizurBox-C-WD5**

Modular enclosures with one door

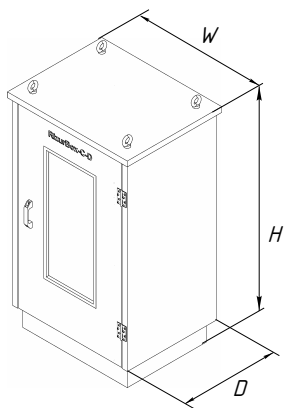

Design variant


RizurBox-C-D1
RizurBox-C-D2
RizurBox-C-D3
RizurBox-C-D4
RizurBox-C-D5
RizurBox-C-D6
RizurBox-C-D7
RizurBox-C-D8
RizurBox-C-D9
RizurBox-C-D10
RizurBox-C-D11
RizurBox-C-D12
RizurBox-C-D13
RizurBox-C-D14
RizurBox-C-D15
RizurBox-C-D16
RizurBox-C-D17
RizurBox-C-D18
RizurBox-C-D19
RizurBox-C-D20
RizurBox-C-D21

Dimensions for reference HxWxD*, mm

1100x700x700
1100x900x700
1100x1100x700
1100x1300x700
1100x900x900
1100x1100x900
1100x1300x900
1600x700x700
1600x900x700
1600x1100x700
1600x1300x700
1600x900x900
1600x1100x900
1600x1300x900
2100x700x700
2100x900x700
2100x1100x700
2100x1300x700
2100x900x900
2100x1100x900
2100x1300x900

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7(4912) 202080, marketing@rizur.ru


Modular enclosures with two doors

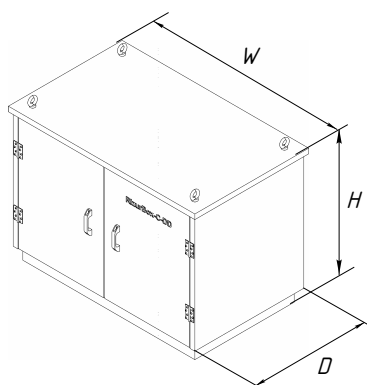

Design variant	Dimensions for reference HxWxD*, mm
RizurBox-C-DD1	1100x1500x700
RizurBox-C-DD2	1100x1900x700
RizurBox-C-DD3	1100x2100x700
RizurBox-C-DD4	1100x1500x900
RizurBox-C-DD5	1100x1900x900
RizurBox-C-DD6	1100x2100x900
RizurBox-C-DD7	1600x1500x700
RizurBox-C-DD8	1600x1900x700
RizurBox-C-DD9	1600x2100x700
RizurBox-C-DD10	1600x1500x900
RizurBox-C-DD11	1600x1900x900
RizurBox-C-DD12	1600x2100x900
RizurBox-C-DD13	2100x1500x700
RizurBox-C-DD14	2100x1900x700
RizurBox-C-DD15	2100x2100x700
RizurBox-C-DD16	2100x1500x900
RizurBox-C-DD17	2100x1900x900
RizurBox-C-DD18	2100x2100x900

* The sizes of enclosures are for reference. To get the drawings with precise dimensional and internal specifications of enclosures, please contact RIZUR engineering department, +7(4912) 202080, marketing@rizur.ru

Enclosures with horizontal opening and all-around access to equipment



Модель	Размеры для справок ВхШхГ*, мм
РизурБокс-С-У1	1100x1500x700
РизурБокс-С-У2	1100x1900x700
РизурБокс-С-У3	1100x2100x700



Reinforced fiberglass enclosure
RizurBox-C-DD4



Reinforced fiberglass enclosure
RizurBox-C-D9



Reinforced fiberglass enclosure
RizurBox-C-U1



INQUIRY FORM № _____

Reinforced fiberglass enclosures RizurBox-C (page 1 of 3)

Company					
Name of the facility					
Contact person					
Phone/fax/e-mail					
Min. and max. operation temperatures, °C				from _____ to _____	
Position tag					
Installed equipment specification (specify ordering codes for equipment, valve assemblies, etc.)					
Number of enclosures acc. to the inquiry form				_____ pcs.	
Enclosure variant RizurBox-C HxWxD, mm					
Diagonally opening enclosures		Diagonally opening enclosures with a tray		CASE type	
<input type="checkbox"/> RizurBox-C-2	365x360x385	<input type="checkbox"/> RizurBox-C-T7	820x470x470	<input type="checkbox"/> RizurBox-C-B-M*	780x1300x510
<input type="checkbox"/> RizurBox-C-4	490x460x390	<input type="checkbox"/> RizurBox-C-T8	820x840x470	<input type="checkbox"/> RizurBox-C-B2-M*	900x1210x760
<input type="checkbox"/> RizurBox-C-5	490x585x390	<input type="checkbox"/> RizurBox-C-T12	800x970x640	<input type="checkbox"/> RizurBox-C-B2-B*	900x1210x760
<input type="checkbox"/> RizurBox-C-6	510x470x420	<input type="checkbox"/> RizurBox-C-T13	540x540x940	<input type="checkbox"/> RizurBox-C-B2-H*	900x1210x760
<input type="checkbox"/> RizurBox-C-7	610x470x470	<input type="checkbox"/> RizurBox-C-T14	850x390x380	<input type="checkbox"/> RizurBox-C-B2-L*	1100x1210x760
<input type="checkbox"/> RizurBox-C-7,5	650x700x500	<input type="checkbox"/> RizurBox-C-T15	1090x390x390	<input type="checkbox"/> RizurBox-C-B2-Lm*	1080x1290x780
<input type="checkbox"/> RizurBox-C-8	610x840x470	<input type="checkbox"/> RizurBox-C-T16	900x820x440	<input type="checkbox"/> RizurBox-C-B3-M*	750x920x760
<input type="checkbox"/> RizurBox-C-9	660x1010x470	Horizontally/vertically split enclosures		<input type="checkbox"/> RizurBox-C-B3-B*	900x920x760
<input type="checkbox"/> RizurBox-C-10	680x680x680			<input type="checkbox"/> RizurBox-C-B3-H*	900x920x760
<input type="checkbox"/> RizurBox-C-11	750x595x680	<input type="checkbox"/> RizurBox-C-WD1	1140x720x820	<input type="checkbox"/> RizurBox-C-B3-L*	1100x920x760
<input type="checkbox"/> RizurBox-C-12	650x970x560	<input type="checkbox"/> RizurBox-C-WD2	1250x700x500	<input type="checkbox"/> RizurBox-C-B4-B*	900x1520x760
<input type="checkbox"/> RizurBox-C-13	570x750x600	<input type="checkbox"/> RizurBox-C-WD3	570x710x590	<input type="checkbox"/> RizurBox-C-B4-L*	1100x1520x760
<input type="checkbox"/> RizurBox-C-16	760x860x760	<input type="checkbox"/> RizurBox-C-WD4	714x610x560	<input type="checkbox"/> RizurBox-C-B4-M*	750x1520x760
MULTI type		<input type="checkbox"/> RizurBox-C-WD5	770x670x560	<input type="checkbox"/> RizurBox-C-B4-B*	640x890x490
<input type="checkbox"/> RizurBox-C-M1	420x250x350	Enclosures with horizontal opening and all-around access to equipment		Enclosures with classical opening	
<input type="checkbox"/> RizurBox-C-M2	680x480x380			<input type="checkbox"/> RizurBox-C-U1	435x415x350
<input type="checkbox"/> RizurBox-C-M3	760x560x560	<input type="checkbox"/> RizurBox-C-U2	435x415x500	<input type="checkbox"/> RizurBox-C-W2	1000x600x500
<input type="checkbox"/> RizurBox-C-M4	500x500x500	<input type="checkbox"/> RizurBox-C-U3	1105x960x1030	<input type="checkbox"/> RizurBox-C-W3	1000x600x350
<input type="checkbox"/> RizurBox-C-M5	610x450x400	Different size: RizurBox-C Model: _____ HxWxD: _____x_____x_____		<input type="checkbox"/> RizurBox-C-W4	1000x1000x400
<input type="checkbox"/> RizurBox-C-M6	680x480x450			<input type="checkbox"/> RizurBox-C-W5	500x470x300
<input type="checkbox"/> RizurBox-C-M7	350x440x420			<input type="checkbox"/> RizurBox-C-W6	850x530x350
<input type="checkbox"/> RizurBox-C-M8	500x440x420			<input type="checkbox"/> RizurBox-C-W7	400x400x250
<input type="checkbox"/> RizurBox-C-M9	385x265x200			<input type="checkbox"/> RizurBox-C-W8	500x470x300
<input type="checkbox"/> RizurBox-C-M10	380x430x430			<input type="checkbox"/> RizurBox-C-W9	1000x800x500
MODULAR ENCLOSURES RizurBox-C-D, RizurBox-C-DD				<input type="checkbox"/> Window <input type="checkbox"/> Additional insulation (flexible elastomeric foam with metal covering)	
Height, mm	Width, mm		Depth, mm		
	1 door	2 doors			
<input type="checkbox"/> 1100	<input type="checkbox"/> 700	<input type="checkbox"/> 1500	<input type="checkbox"/> 700		
<input type="checkbox"/> 1600	<input type="checkbox"/> 900	<input type="checkbox"/> 1700	<input type="checkbox"/> 900		
<input type="checkbox"/> 2100	<input type="checkbox"/> 1100	<input type="checkbox"/> 1900	<input type="checkbox"/> 1100		
<input type="checkbox"/> _____other	<input type="checkbox"/> 1300	<input type="checkbox"/> 2100	<input type="checkbox"/> _____other		
Mounting elements for the equipment:					
<input type="checkbox"/> Tube adapter (OD=57mm)	<input type="checkbox"/> Mounting panel	<input type="checkbox"/> DIN-rail	<input type="checkbox"/> Mounting rails	Describe the required mounting parts in the field «Additional information»	
<input type="checkbox"/> Standard (250 mm)	<input type="checkbox"/> Standard (260x340 mm)	<input type="checkbox"/> DIN _____mm, L _____mm, _____pcs.	<input type="checkbox"/> L _____mm, _____pcs.		
<input type="checkbox"/> Non-standard	<input type="checkbox"/> Non-standard	<input type="checkbox"/> DIN _____mm, L _____mm, _____pcs.	<input type="checkbox"/> L _____mm, _____pcs.		
			<input type="checkbox"/> L _____mm, _____pcs.		
			<input type="checkbox"/> L _____mm, _____pcs.		

* The letters L and M in the names of various models of enclosures signify that the upper part is equal to the lower part.
The letter B is used if the upper part of the enclosure is larger than the lower one. The letter H shows that the lower part of enclosure is larger than the upper one.




000 «NPO RIZUR» www.rizur.ru +7 (4912) 20-20-80

INQUIRY FORM № _____

Reinforced fiberglass enclosures RizurBox-C (page 2 of 3)

Mounting elements for enclosure:	Heating:
<input type="checkbox"/> Without mounting elements <input type="checkbox"/> Floor – floor stand (enclosure is mounted on a horizontal surface). Standard height 1000 mm If not standard, please specify H=_____ mm <u>Variants of floor mounting:</u> <input type="checkbox"/> mounting under the bottom <input type="checkbox"/> mounting to enclosure rear wall <input type="checkbox"/> Wall hanging – rail for enclosure mounting onto vertical surface <input type="checkbox"/> On site fence rail <input type="checkbox"/> On a pipeline – clamps for enclosure mounting on a pipeline Please, specify the external diameter of the pipe Ø=_____ mm <u>Options for mounting on a pipeline:</u> <input type="checkbox"/> Horizontal pipe passes through enclosure <input type="checkbox"/> Vertical pipe passes through enclosure <input type="checkbox"/> Horizontal pipe passes under enclosure <input type="checkbox"/> Vertical pipe passes behind enclosure <input type="checkbox"/> On a flange Please, specify flange diameter Ø=_____ mm <input type="checkbox"/> Other Specify the necessary mounting elements: _____	<input type="checkbox"/> Without heating <input type="checkbox"/> Electric heating: <input type="checkbox"/> FT-variant <input type="checkbox"/> ST-variant –maintaining_____°C (specify within the range of -40°C ...+50°C) <input type="checkbox"/> SR-variant –maintaining_____°C (specify within the range of -40°C ...+50°C) –temperature when alarm indication is on (relay output) _____°C/_____°C <input type="checkbox"/> AR-variant <u>Heating power:</u> <input type="checkbox"/> recommended by the manufacturer <input type="checkbox"/> _____W <input type="checkbox"/> Heat-exchange pipe (water/steam) <input type="checkbox"/> welded <input type="checkbox"/> thread G3/4" <input type="checkbox"/> thread G1/2" <input type="checkbox"/> other thread _____
Cable/tube glands:	
Heating power cable Ø_____mm metal hose Ø_____ mm, _____ pcs Cable/tube Ø_____ mm metal hose Ø_____ mm, _____ pcs Cable/tube Ø_____ mm metal hose Ø_____ mm, _____ pcs Cable/tube Ø_____ mm metal hose Ø_____ mm, _____ pcs Heat-insulated gland PILT _____ pcs	<u>Holes for cable glands and impulse lines:</u> <input type="checkbox"/> not drilled (supplied as a set) <input type="checkbox"/> drilled (it's necessary to specify the holes layout in your order)
Impulse tubing heating:	
<input type="checkbox"/> Without heating <input type="checkbox"/> Preinsulated tubing bundle of impulse lines RizurPak (see below) <input type="checkbox"/> Soft enclosure RIZUR for impulse tubes (see below)	
Preinsulated tubing bundle of impulse lines RizurPak	
Length of tubing bundle _____m Quantity of impulse tubes inside the bundle, _____ pcs. External diameter of impulse tubes _____ mm Maximum temperature of the medium in the tubes _____°C Temperature of cleaning/steam-cleaning _____°C Medium temperature maintained in the tube _____°C Maximum pressure _____ MPa <input type="checkbox"/> Compression fitting for process connection _____ pcs. Process connection thread type: male/female _____ <input type="checkbox"/> Compression fitting for equipment connection _____ pcs. Equipment connection thread type male/female _____ <input type="checkbox"/> Heat shrinks for sealing bundle ends _____ pcs. <input type="checkbox"/> Sealing kit for junction box entry and heating cable termination _____ pcs. <input type="checkbox"/> Adjustable thermoregulator for maintaining the exact temperature inside the bundle (shipped with a coating repair kit for installing the thermoregulator sensor under the bundle coating) _____ pcs. <input type="checkbox"/> Insulation repair kit in the event of external insulation damage _____ pcs. <input type="checkbox"/> Sealant heat-shrinkable fitting for tubing bundle entry into an enclosure _____ pcs. (Please, specify enclosure wall width - _____mm)	<u>Scope of supply:</u> <input type="checkbox"/> Fully assembled tubing bundle of impulse lines (see the scheme below) Specify the length in accordance with the scheme: A=_____mm C=_____mm B=_____mm D=_____mm F=_____mm <input type="checkbox"/> Tubes shipped in coils, without preliminary cutting or other preparations. Specify the required length of bundle: _____ m <input type="checkbox"/> Shipped as tube segments of specified lengths, without preliminary sealing or other preparations Specify the required length of the bundle: _____

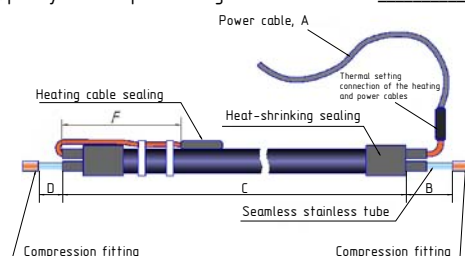



INQUIRY FORM № _____

Reinforced fiberglass enclosures RizurBox-C (page 3 of 3)

Soft enclosure RIZUR for impulse tubes
Length of the enclosure (tubing bundle) _____ m External diameter of impulse tubes inside the bundle _____ mm Maximum temperature of the medium in tubes _____ °C Temperature of cleaning/steam cleaning _____ °C Medium temperature maintained in the tube _____ °C
Heating of the pressure tap
<input type="checkbox"/> Soft enclosure for the pressure tap (root, tap, diaphragm, etc.) Please, provide a drawing of the pressure tap point
Delivery options
<input type="checkbox"/> Basic (all parts are shipped non-assembled) <input type="checkbox"/> Standard (similar to the Basic set, except the heating system and all mounting components inside the enclosure are assembled) <input type="checkbox"/> System (similar to the Standard set, except it includes all the required connecting, locking and regulating components (fittings, taps, valves, impulse tubes, pre-insulated tubing bundles RizurPak, valve assemblies, etc.) <u>For System set, you need the following :</u> 1. Provide the layout of tubing/impulse framework in the enclosure 2. Specify maximum temperature of the medium in the tubes _____ °C 3. Specify maximum pressure in the tubes _____ MPa <input type="checkbox"/> Full set (Full set includes an assembled unit ready for connection on-site, with control and measuring equipment installed) <u>For Full set you need the following:</u> 1. Provide the layout of tubing/impulse framework in the enclosure 2. Provide a full list of control and measuring equipment to be installed <input type="checkbox"/> the equipment is delivered by the Customer <input type="checkbox"/> the equipment is delivered by the Supplier (specify the exact codes for the required equipment or inquiry forms with preferable manufacturers) 3. Specify maximum temperature of the medium in the tubes _____ °C 4. Specify maximum pressure in the tubes _____ MPa
Additional information

If the phrasing in the inquiry form seems unclear or there're any other questions,
please phone for an explanation +7 (4912) 20-20-80