

000 «NPO RIZUR» www.rizur.ru +7 (4912) 20-20-80



## INQUIRY FORM № \_\_\_\_\_

Insulated metal enclosure RizurBox-M (page 1 of 3)

Company			
Name of the facility			
Contact person			
Phone/fax/e-mail			
Min. and max. operation temperatures, °C		from _____ to _____	
Position tag			
Installed equipment specification (specify ordering codes for equipment, valve assemblies, etc.)			
Number of enclosures acc. to the inquiry form		_____ pcs.	
<b>Enclosure variant RizurBox-M HxWxD, mm</b>			
<b>Diagonal opening</b> <input type="checkbox"/> RizurBox-M-RD-550x400x400 <input type="checkbox"/> RizurBox-M-RD-650x600x600 <input type="checkbox"/> RizurBox-M-RD-650x850x600 <input type="checkbox"/> RizurBox-M-RD-650x1100x600 <input type="checkbox"/> RizurBox-M-RD-650x890x600 <input type="checkbox"/> RizurBox-M-RD-750x600x400 <input type="checkbox"/> RizurBox-M-RD-____x____x____ <b>Classical opening</b> <input type="checkbox"/> RizurBox-M-RK-450x600x650 <input type="checkbox"/> RizurBox-M-RK-500x350x210 <input type="checkbox"/> RizurBox-M-RK-500x500x400 <input type="checkbox"/> RizurBox-M-RK-600x500x500 <input type="checkbox"/> RizurBox-M-RK-600x500x600 <input type="checkbox"/> RizurBox-M-RK-600x600x600 <input type="checkbox"/> RizurBox-M-RK-600x900x600 <input type="checkbox"/> RizurBox-M-RK-650x400x600 <input type="checkbox"/> RizurBox-M-RK-745x745x630 <input type="checkbox"/> RizurBox-M-RK-800x500x500 <input type="checkbox"/> RizurBox-M-RK-800x600x500 <input type="checkbox"/> RizurBox-M-RK-800x1100x600 <input type="checkbox"/> RizurBox-M-RK-1000x600x300 <input type="checkbox"/> RizurBox-M-RK-1000x600x500 <input type="checkbox"/> RizurBox-M-RK-1000x600x600 <input type="checkbox"/> RizurBox-M-RK-1000x800x600 <input type="checkbox"/> RizurBox-M-RK-1000x1500x1000 <input type="checkbox"/> RizurBox-M-RK-1090x890x480 <input type="checkbox"/> RizurBox-M-RK-1100x700x700 <input type="checkbox"/> RizurBox-M-RK-1190x690x690 <input type="checkbox"/> RizurBox-M-RK-1200x600x600 <input type="checkbox"/> RizurBox-M-RK-1200x800x500 <input type="checkbox"/> RizurBox-M-RK-1200x800x600 <input type="checkbox"/> RizurBox-M-RK-1250x1800x500 <input type="checkbox"/> RizurBox-M-RK-1350x500x300		<input type="checkbox"/> RizurBox-M-RK-1400x700x600 <input type="checkbox"/> RizurBox-M-RK-1400x800x600 <input type="checkbox"/> RizurBox-M-RK-1490x1790x800 <input type="checkbox"/> RizurBox-M-RK-1500x600x600 <input type="checkbox"/> RizurBox-M-RK-1500x1400x2000 <input type="checkbox"/> RizurBox-M-RK-1600x800x500 <input type="checkbox"/> RizurBox-M-RK-1600x800x740 <input type="checkbox"/> RizurBox-M-RK-1600x1200x500 <input type="checkbox"/> RizurBox-M-RK-1600x1400x800 <input type="checkbox"/> RizurBox-M-RK-1700x600x600 <input type="checkbox"/> RizurBox-M-RK-1850x900x500 <input type="checkbox"/> RizurBox-M-RK-1850x1300x1300 <input type="checkbox"/> RizurBox-M-RK-2000x700x700 <input type="checkbox"/> RizurBox-M-RK-2000x990x990 <input type="checkbox"/> RizurBox-M-RK-2000x1400x750 <input type="checkbox"/> RizurBox-M-RK-2060x900x600 <input type="checkbox"/> RizurBox-M-RK-2100x1600x800 <input type="checkbox"/> RizurBox-M-RK-2100x2000x1100 <input type="checkbox"/> RizurBox-M-RK-2200x1000x600 <input type="checkbox"/> RizurBox-M-RK-____x____x____ <b>Vertically-split</b> <input type="checkbox"/> RizurBox-M-RV-800x1700x800 <input type="checkbox"/> RizurBox-M-RV-1085x2685x585 <input type="checkbox"/> RizurBox-M-RV-1600x1280x800 <input type="checkbox"/> RizurBox-M-RV-1730x1650x1520 <input type="checkbox"/> RizurBox-M-RV-2100x1600x800 <input type="checkbox"/> RizurBox-M-RV-____x____x____ <b>Horizontally-split</b> <input type="checkbox"/> RizurBox-M-RG-1100x600x700 <input type="checkbox"/> RizurBox-M-RG-1150x1200x600 <input type="checkbox"/> RizurBox-M-RG-1200x2100x1100 <input type="checkbox"/> RizurBox-M-RG-1400x800x600 <input type="checkbox"/> RizurBox-M-RG-1400x1200x1000 <input type="checkbox"/> RizurBox-M-RG-____x____x____	
		<b>Options</b>	
		<input type="checkbox"/> Observation window  <input type="checkbox"/> Additional insulation (foamed insulator with metallized coating)  <input type="checkbox"/> Non-insulated  <input type="checkbox"/> Insulated, single-walled (foamed insulator with metallized coating)  <input type="checkbox"/> Made from stainless steel  <input type="checkbox"/> RAL _____ (powder-polymer coating «antique silver»)	
<b>Mounting elements for the equipment:</b>			
<input type="checkbox"/> Tube adapter (OD=57mm)  <input type="checkbox"/> Standard (250 mm) <input type="checkbox"/> Non-standard _____	<input type="checkbox"/> Mounting panel  <input type="checkbox"/> Standard (260x340 mm) <input type="checkbox"/> Non-standard _____	<input type="checkbox"/> DIN-rail  <input type="checkbox"/> DIN _____mm, L _____mm, _____pcs.  <input type="checkbox"/> DIN _____mm, L _____mm, _____pcs.	<input type="checkbox"/> Mounting rails <input type="checkbox"/> L _____mm, _____pcs. <input type="checkbox"/> L _____mm, _____pcs. <input type="checkbox"/> L _____mm, _____pcs. <input type="checkbox"/> L _____mm, _____pcs.
			<input type="checkbox"/> Other  Describe the required mounting parts in the field «Additional information»



# INQUIRY FORM № \_\_\_\_\_

## Reinforced fiberglass enclosures RizurBox-M (page 2 of 3)

Mounting elements for enclosure:	Heating:
<input type="checkbox"/> Without mounting elements	<input type="checkbox"/> Without heating
<input type="checkbox"/> Floor - floor stand (enclosure is mounted on a horizontal surface) . Standard height 1000 mm If not standard, please specify H=_____ mm  <u>Variants of floor mounting:</u> <input type="checkbox"/> mounting under the bottom <input type="checkbox"/> mounting to enclosure rear wall	<input type="checkbox"/> Electric heating: <input type="checkbox"/> FT-variant  <input type="checkbox"/> ST-variant -maintaining _____ °C (specify within the range of -40°C ...+50°C)  <input type="checkbox"/> SR-variant -maintaining _____ °C (specify within the range of -40°C ...+50°C) -temperature when alarm indication is on (relay output) _____ °C / _____ °C  <input type="checkbox"/> AR-variant  <u>Heating power:</u> <input type="checkbox"/> recommended by the manufacturer  <input type="checkbox"/> _____ W
<input type="checkbox"/> Wall hanging - rail for enclosure mounting onto vertical surface. <input type="checkbox"/> On site fence rail	<input type="checkbox"/> Heat-exchange pipe (water/steam) <input type="checkbox"/> welded <input type="checkbox"/> thread G3/4" <input type="checkbox"/> thread G1/2" <input type="checkbox"/> other thread _____
<input type="checkbox"/> On a pipeline - clamps for enclosure mounting on a pipeline Please, specify the external diameter of the pipe Ø=_____ mm  <u>Options for mounting on a pipeline:</u> <input type="checkbox"/> Horizontal pipe passes through enclosure <input type="checkbox"/> Vertical pipe passes through enclosure <input type="checkbox"/> Horizontal pipe passes under enclosure <input type="checkbox"/> Vertical pipe passes behind enclosure	
<input type="checkbox"/> On a flange Please, specify flange diameter Ø=_____ mm  <input type="checkbox"/> Other Specify the necessary mounting elements _____	

### Cable/tube glands:

Heating power cable Ø \_\_\_\_\_ mm metal hose Ø \_\_\_\_\_ mm, \_\_\_\_\_ pcs  
 Cable/tube Ø \_\_\_\_\_ mm metal hose Ø \_\_\_\_\_ mm, \_\_\_\_\_ pcs  
 Cable/tube Ø \_\_\_\_\_ mm metal hose Ø \_\_\_\_\_ mm, \_\_\_\_\_ pcs  
 Cable/tube Ø \_\_\_\_\_ mm metal hose Ø \_\_\_\_\_ mm, \_\_\_\_\_ pcs  
 Heat-insulated gland PILT \_\_\_\_\_ pcs

**Holes for cable glands and impulse lines:**  
 not drilled (supplied as a set)  
 drilled (it's necessary to specify the holes layout in your order)

### Impulse tubing heating:

- Without heating  
 Preinsulated tubing bundle of impulse lines RizurPak (see below)  
 Soft enclosure RIZUR for impulse tubes (see below)

#### Preinsulated tubing bundle of impulse lines RizurPak

Length of tubing bundle \_\_\_\_\_ m  
 Quantity of impulse tubes inside the bundle, \_\_\_\_\_ pcs.  
 External diameter of impulse tubes \_\_\_\_\_ mm  
 Maximum temperature of the medium in the tubes \_\_\_\_\_ °C  
 Temperature of cleaning/steam-cleaning \_\_\_\_\_ °C  
 Required maintained temperature of the medium in the tube \_\_\_\_\_ °C  
 Maximum pressure in the tube \_\_\_\_\_ MPa  
 Compression fitting for process connection \_\_\_\_\_ pcs.  
 Process connection thread type: male/female \_\_\_\_\_  
 Compression fitting for equipment connection \_\_\_\_\_ pcs.  
 Equipment connection thread type male/female \_\_\_\_\_  
 Heat shrinks for sealing bundle ends \_\_\_\_\_ pcs.  
 Sealing kit for junction box entry and heating cable termination \_\_\_\_\_ pcs.  
 Adjustable thermoregulator to maintain exact temperature inside the bundle (shipped with a coating repair kit for installing the thermoregulator sensor under the bundle coating) \_\_\_\_\_ pcs.  
 Insulation repair kit in the event of external insulation damage \_\_\_\_\_ pcs.  
 Sealant heat-shrinkable fitting for tubing bundle entry into an enclosure \_\_\_\_\_ pcs. (Please, specify enclosure wall width - \_\_\_\_\_ mm)

**Scope of supply:**  
 Fully assembled tubing bundle of impulse lines (see the scheme below)  
 Specify the length in accordance with the scheme:


A= \_\_\_\_\_ mm C= \_\_\_\_\_ mm B= \_\_\_\_\_ mm

D= \_\_\_\_\_ mm F= \_\_\_\_\_ mm

Tubes shipped in coils, without preliminary cutting or other preparations.

Specify the required length of bundle: \_\_\_\_\_ m

Shipped as tube segments of specified lengths, without preliminary sealing or other preparations  
 Specify the required length of the bundle: \_\_\_\_\_

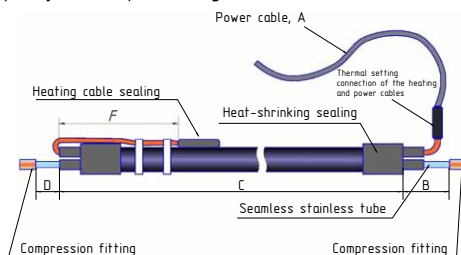



000 «NPO RIZUR» www.rizur.ru +7 (4912) 20-20-80

## INQUIRY FORM № \_\_\_\_\_

Reinforced fiberglass enclosures RizurBox-C (page 3 of 3)

Soft enclosure RIZUR for impulse tubes
Length of the enclosure (tubing bundle) _____ m External diameter of impulse tubes inside the bundle _____ mm Maximum temperature of the medium in tubes _____ °C Temperature of cleaning/steam cleaning _____ °C Required temperature of the medium maintained in a tube _____ °C
Heating of the pressure tap
<input type="checkbox"/> Soft enclosure for the pressure tap (root, tap, diaphragm, etc.) Please, provide a drawing of the pressure tap point
Delivery options
<input type="checkbox"/> <b>Basic</b> (all parts are shipped non-assembled)  <input type="checkbox"/> <b>Standard</b> (similar to the Basic set, except the heating system and all mounting components inside the enclosure are assembled)  <input type="checkbox"/> <b>System</b> (similar to the Standard set, except it includes all the required connecting, locking and regulating components (fittings, taps, valves, impulse tubes, pre-insulated tubing bundles RizurPak, valve assemblies, etc.)  <u>For System set, you need the following :</u> 1. Provide the layout of tubing/impulse framework in the enclosure 2. Specify maximum temperature of the medium in the tubes _____ °C 3. Specify maximum pressure in the tubes _____ MPa  <input type="checkbox"/> <b>Full set</b> (Full set includes an assembled unit ready for connection on-site, with control and measuring equipment installed) <u>For Full set you need the following:</u> 1. Provide the layout of tubing/impulse framework in the enclosure 2. Provide a full list of control and measuring equipment to be installed <input type="checkbox"/> the equipment is delivered by the Customer <input type="checkbox"/> the equipment is delivered by the Supplier (specify the exact codes for the required equipment or inquiry forms with preferable manufacturers) 3. Specify maximum temperature of the medium in the tubes _____ °C 4. Specify maximum pressure in the tubes _____ MPa
Additional information

If the phrasing in the inquiry form seems unclear or there're any other questions,  
please phone for an explanation +7 (4912) 20-20-80